


# Mecmesin

testing to perfection

## Vortex-dV

Digital Motorised Torque Testing System  
with *VectorPro™ Lite* data acquisition software

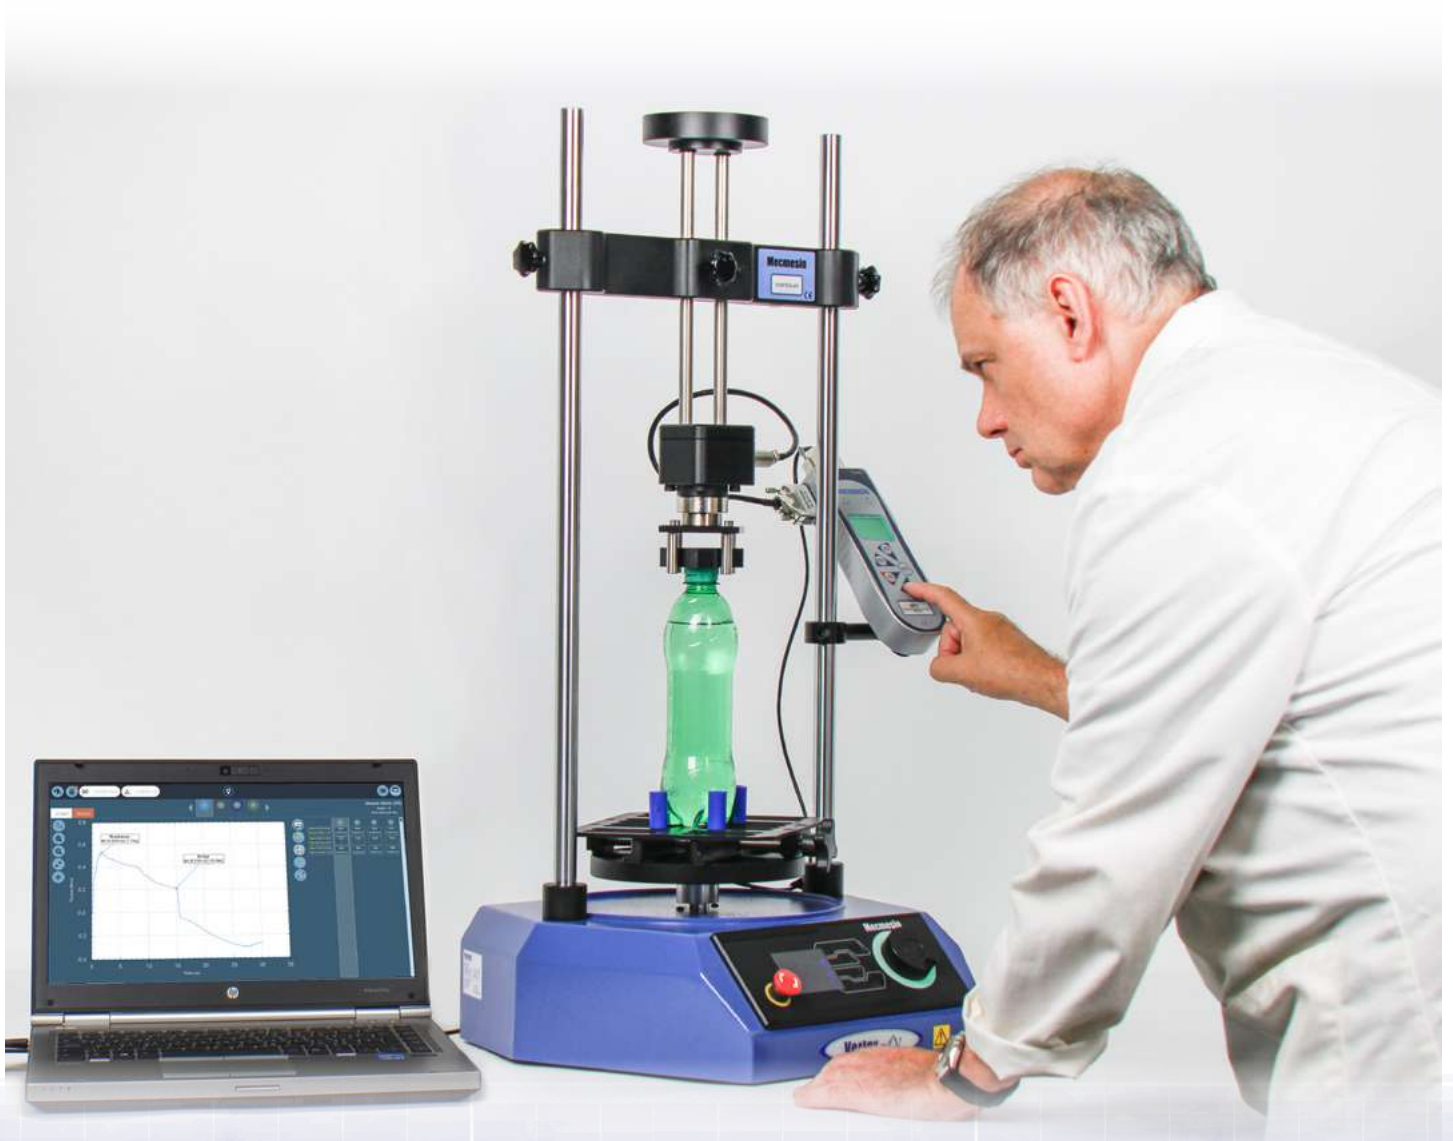

Closure Torque



Torque to Turn



Fastening Torque

# Vortex-dV

## Digital Motorised Torque Testing System

### Key Features

The Vortex-dV is a versatile and affordable torque testing system, comprising a precision-controlled motorised stand with a choice of torque transducers, an AFTI digital torque display and data capture unit, and a range of grips and fixtures. This robust and simple to use system is suited to either R&D in the laboratory, or quality control in the production area. It improves greatly on manual units with accurate gripping and precise speed control, and in batch testing, eliminates user repetitive strain injury.

**4 models**

- 1.5 N.m
- 3 N.m
- 6 N.m
- 10 N.m

**4 test modes**

- Manual bidirectional control
- Run to or between positions
- Run to break
- Run to torque

**Grips and fixtures**

A range of standard fixtures is available, including mounting tables and chucks. Custom fixtures, including dedicated mandrels, available on request.

**Control panel display**

Clear indication of speed, angle and torque.

**4 simple buttons to operate**

Just 4 multifunction buttons for all settings and operation.

**USB Connection**

Connect to a PC with VectorPro™ Lite software, for test settings and results storage, streaming data, graph plotting, calculations, and basic statistics.

**Top load tray**

To apply static loads during testing; particularly suitable for child-resistant closure testing

**AFTI Display Unit**

Receives, stores and transmits torque data, captures first and ultimate peak values, with pass/fail indicator, and can be used to set control limits for the Vortex-dV.

**Multifunction wheel**

Fine control allows precise setting of speed and position. Coloured LEDs clearly indicate machine status during testing.

**Robust, rigid construction**

Splash proof and suitable for either laboratory or factory floor environments.

**Mecmesin**

**0.0000**

**21.85**  
N.cm

**-33.3**  
deg


**0.00**  
rev/min

**Vortex-dV**

## Vortex-dV Controls

The Vortex-dV has a simple-to-use front panel for precise selection of test parameters. Based on the tried and tested Vortex frame, it has completely new control electronics to deliver superior performance combined with affordability.


It can be used standalone with an AFTI torque display unit, or combined with VectorPro™ Lite for acquisition, plotting and analysis of data with controlled storage of test routines.

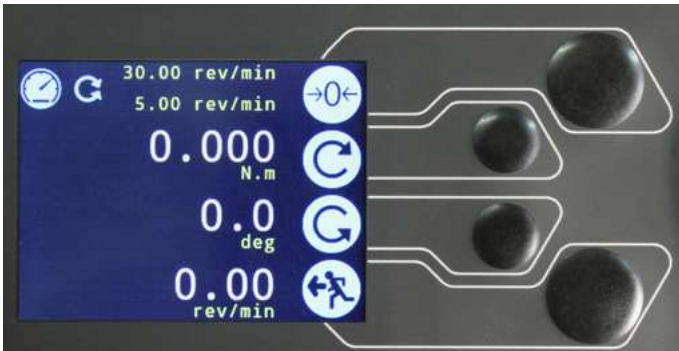

◀ Clear colour display of status, clockwise and anticlockwise speeds, position and torque.



◀ Four multifunction buttons for all settings and operation. Multi-language display.

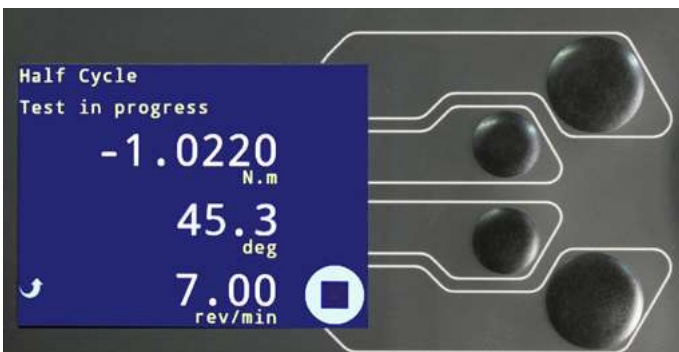

◀ Continuous live readings during testing, including status and cycle count, plus peak and break capture by AFTI, or full data capture and plotting with VectorPro™ Lite.



▲ Lights indicate stand status  
Dial positions drive spindle precisely  
Centre button confirms menu settings

# Specifications

Vortex-dV		1.5 N.m	3 N.m	6 N.m	10 N.m
Measurement range	N.m	0 – 1.5	0 – 3.0	0 – 6.0	0 – 10.0
	kgf.cm	0 – 15	0 – 30	0 – 60	0 – 100
	lbf.in	0 – 13	0 – 26	0 – 52	0 – 90
<b>Dimensions</b>					
Maximum travel of adjustable transducer carriage		182 mm (7.2")			
Maximum headroom		505 mm (19.9") [448 mm (17.6")]*			
Width between columns		280 mm (11.02")			
Weight		19.5 kg (48 lb)			
<b>Power requirements</b>					
Voltage		230 V AC 50 Hz or 110 V AC 60 Hz			
Max power		100 W			
<b>Torque measurement (AFTI)</b>					
Torque accuracy		0.5% of full scale			
Torque units		mN.m, N.m, kgf.cm, lbf.in, ozf.in (as per AFTI)			
<b>Speed</b>					
Speed range		0.1 rev/min to 30 rev/min (clockwise and anticlockwise)			
Speed accuracy		±1% of indicated speed			
Speed resolution		0.01 rev/min, (0.1°/s)			
<b>Displacement</b>					
Maximum displacement		8000 revs			
Displacement accuracy		0.2° per 36,000°			
Displacement resolution		0.1° (0.001 rev)			

\* with upper and lower mounting table fitted

## Build the system that is right for you...

To configure a **Vortex-dV** system you need to purchase separately:

- the Vortex-dV stand
  - The Vortex-dV's multi-function wheel allows you to set test speed, direction of rotation and to select from pre-set routines:
    - Half cycle      - Multiple cycles
    - Run to limit    - Run to angle
- a choice of 1.5 N.m, 3 N.m, 6 N.m, or 10 N.m static torque sensors
- AFTI torque display unit and interface cable
  - The AFTI display unit, when connected to a torque sensor continuously measures torque and captures the peak value.
  - Results can be transmitted to a PC or printer.
- an appropriate grip to hold your sample
  - An extensive range of grips and fixtures is available to hold your samples – consult Mecmesin for advice.

and to expand functionality much further:

- VectorPro™ Lite test data acquisition software (see pages 6-7)

▶ AFTI Torque Display




▲ versatile mounting tables

▲ 4-jaw chucks



▲ half-round jaw sets

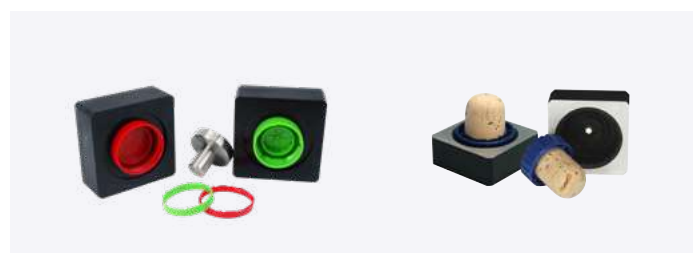


▲ dedicated closure mandrels


## Accurate sample holding

Mecmesin offers a wide range of standard grips and fixtures suitable for most testing. We also offer a custom engineering service to design and manufacture exact-fit closure mandrels for the most accurate testing of closure torques. Many torque tests involve asymmetric samples, for which we also can devise specialised grips to ensure accurate axial alignment. The key to repeatable testing is not only a constant test speed but also uniform, consistent gripping of the sample.


## Typical Applications

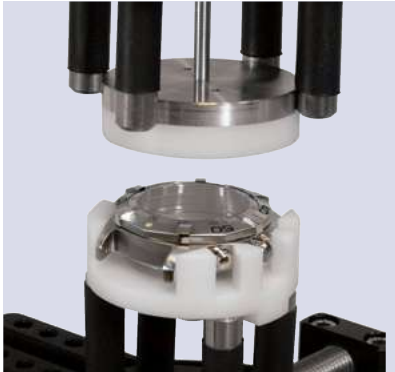


▲ watch bezel

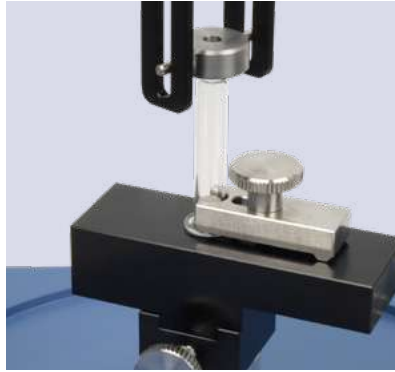

▲ medical devices: luer locks

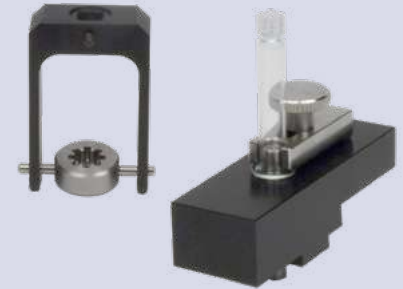

▲ valves: radiator thermostat

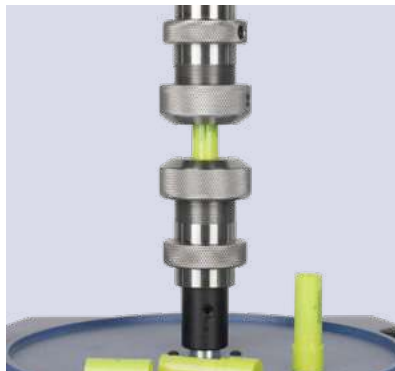

▲ cosmetics packaging




▲ child resistant closures (CRC)




▲ Stelvin® / ROPP closures (metal)



▲ twist-off crown corks

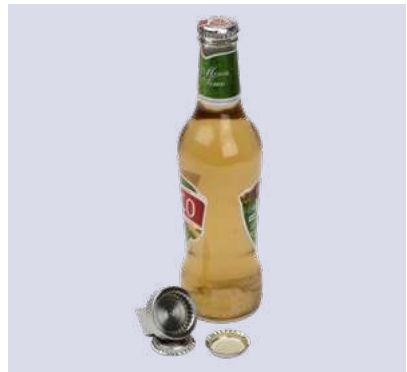

▲ tamper-evident closures (plastic)

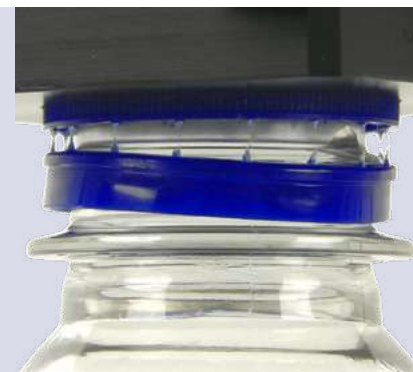

\* for comprehensive details of our gripping solutions for closures, go to <http://www.closuretesting.com>

# VectorPro™ Lite

## Test Data Acquisition Software



Collect and control your test data, and interface with shopfloor SPC systems.

VectorPro Lite enables the same basic test routines that are available through the Vortex-*dV* panel controls, to be set up and stored on a PC, with their settings, for re-use. Any single test routine can be uploaded from VectorPro™ Lite to the Vortex-*dV* and can be run from the software to

provide real-time torque/angle/time plotting.

Standard calculations can be added to the test profiles to provide a selected range of results, basic statistical analysis, and pass-fail criteria for samples tested. Results and raw data are stored, and can be exported as .tab, .csv or Excel® files for external SPC programs, or printed in report format.



Supplied with individual USB Software License key

### Personalised user accounts with simplified workspaces

Create personalised workspaces to simplify operations. Apply permissions to control who can access, run, edit or create tests, view results, and produce reports.

### Drag and drop test-building

Drag and drop all the elements needed to create a test routine, apply calculations and build reports. Create repeatable tests in moments and refine them as you go. Each test profile has full version tracking and results storage, along with customisable test summary information.


**Calculations**

- Area under a graph
- Average value (mean)
- Best fit and slope trend lines
- Break point
- Value of x-axis at y-axis value
- Min and Max values
- Peak and Trough

Calculations can be evaluated as pass/fail against your own tolerance values

## Live plotting of tests

View tests as they run, with instant calculation or pass/fail results. Get in close to your sample data: Switch axes, zoom, pan, view data point values. Offset sample traces for clarity and comparison. Any results can be re-viewed at any time.

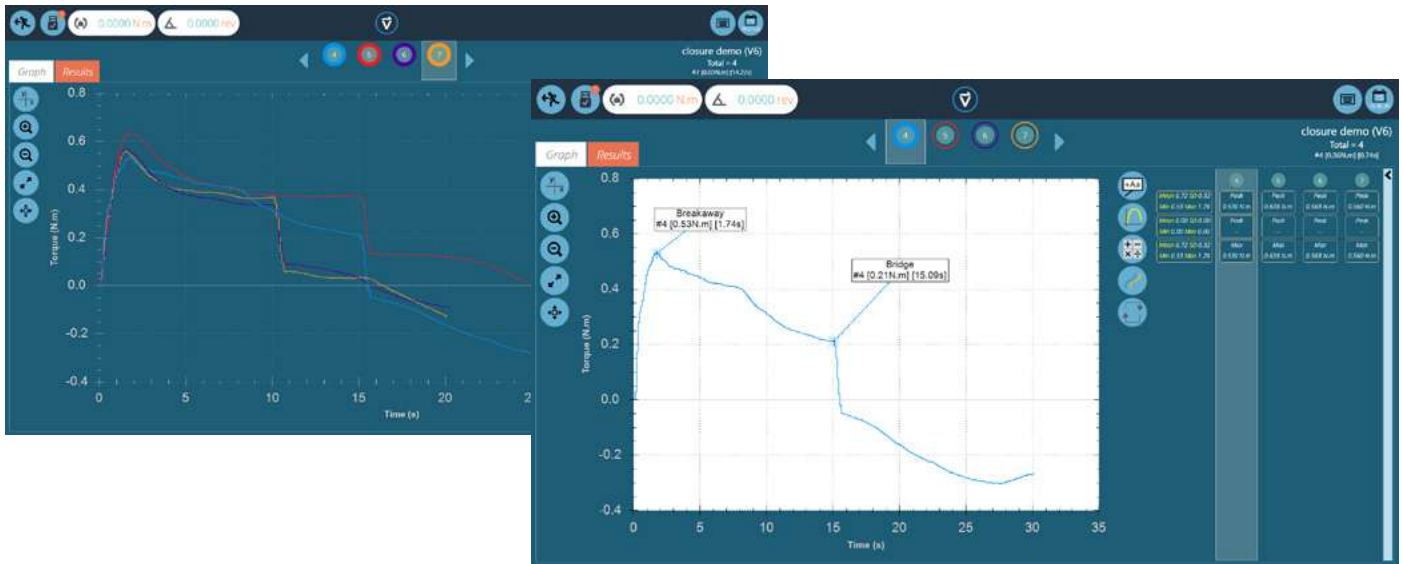

## Results handling

- Compare the plots of tested samples and add spot calculations not included in the test profile.
- Select out the samples you want to compare, and adjust calculation parameters temporarily or to save.
- Export raw data, or results, to delimited or Excel files, email a table of results. Create a report of results, graphs and notes to print or save as PDF.

**Offset samples**

**Export data**

**Export**

Sample	Peak(N.m)	Peak(N.m)(X)	Max(t.m)
#1	0.53	0.53	0.54
#4	0.21	0.21	0.21
#7	0.58	0.58	0.58
#10	0.52	0.52	0.52

**User-defined report templates**

# Mecmesin

testing to perfection

## Mecmesin - a world leader in affordable force and torque testing solutions

Since 1977, Mecmesin has assisted thousands of companies achieve enhanced quality control in design and production. The Mecmesin brand represents excellence in accuracy, build, service, and value. In production centres and research labs worldwide, designers, engineers, operators, and quality managers endorse Mecmesin force and torque testing systems for their high performance across countless applications.

[www.mecmesin.com](http://www.mecmesin.com)



Algeria	India	Poland
Argentina	Indonesia	Portugal
Australia	Iran	Romania
Austria	Ireland	Russia
Bangladesh	Israel	Saudi Arabia
Belgium	Italy	Serbia
Brazil	Japan	Singapore
Bulgaria	Korea	Slovakia
Cambodia	Kosovo	Slovenia
Canada	Kuwait	South Africa
Chile	Laos	Spain
China	Latvia	Sri Lanka
Colombia	Lebanon	Sweden
Costa Rica	Lithuania	Switzerland
Croatia	Macedonia	Syria
Czech Republic	Malaysia	Taiwan
Denmark	Mexico	Thailand
Ecuador	Morocco	Tunisia
Egypt	Myanmar	Turkey
Estonia	Netherlands	UAE
Finland	New Zealand	UK
France	Norway	Uruguay
Germany	Paraguay	USA
Greece	Peru	Vietnam
Hungary	Philippines	

The Mecmesin global distribution network guarantees your testing solution is rapidly delivered and efficiently serviced, wherever you are.



FS 58553

DISTRIBUTOR STAMP

### Head Office - UK Mecmesin Limited

w: [www.mecmesin.com](http://www.mecmesin.com)  
e: [sales@mecmesin.com](mailto:sales@mecmesin.com)

### North America Mecmesin Corporation

w: [www.mecmesincorp.com](http://www.mecmesincorp.com)  
e: [info@mecmesincorp.com](mailto:info@mecmesincorp.com)

### France Mecmesin France

w: [www.mecmesin.fr](http://www.mecmesin.fr)  
e: [contact@mecmesin.fr](mailto:contact@mecmesin.fr)

### Asia Mecmesin Asia Co., Ltd

w: [www.mecmesinasia.com](http://www.mecmesinasia.com)  
e: [sales@mecmesinasia.com](mailto:sales@mecmesinasia.com)

### Germany Mecmesin GmbH

w: [www.mecmesin.de](http://www.mecmesin.de)  
e: [info@mecmesin.de](mailto:info@mecmesin.de)

### China Mecmesin (Shanghai) Pte Ltd

w: [www.mecmesin.cn](http://www.mecmesin.cn)  
e: [sales@mecmesin.cn](mailto:sales@mecmesin.cn)